

powertechnique

PT(S)110

Voltage (V): **400/230**

Frequency (Hz): **50**

STATIONARY WITH CANOPY

AUTOMATIC WITHOUT ATS

Technical Information


PRP Power (Kva)	100
Standby Power	110
PRP Power (Kw)	80
Standby Power (Kw)	88
Model	STATIONARY WITH CANOPY

Weight and Dimensions (mm)

Length (L)	2800
Width (W)	980
Height (H)	1535
Weight (kg)	1708
Fuel tank capacity (l)	180

Noise Level

Acoustic pressure [LpA] (Dba)	69
Acoustic power [LwA] (Dba)	97

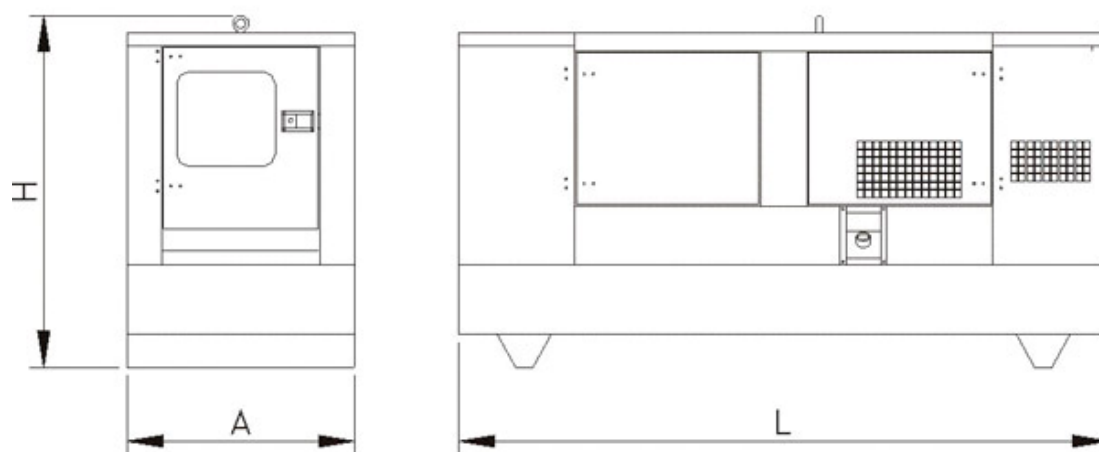

Consumption

	PRP Power		Standby Power	
	L/h	Range (hours)	L/h	Range (hours)
25%	0	0	0	0
50%	11.8	15.3	0	0
75%	17.1	10.5	0	0
100%	22.6	8	24.9	7.2

Engine

Brand	PERKINS
Model	1104C-44TAG2
Electronic regulation	✓
No. of Cylinders	4
Engine Capacity	4400
Bore (mm)	105
Stroke (mm)	127
Compression ratio	18.3:1
Water cooled	✓
Speed (r.p.m.)	1500
Preheating system	✓
Fuel tank capacity (l)	180

Cooling System

Flow of air from fan (m3/min)	165.6
-------------------------------	--------------

Lubrication System

Oil sump capacity (l)	8
Maximum oil consumption (%fuel consumption)	0.15

Air Intake System

Aspirated air flow (m3/min)	6.27
-----------------------------	-------------

Electrical System

Batteries	12V 97 Ah
-----------	------------------

Exhaust System

Input diameter (")	3
Output diameter (")	4.5
Exhaust diameter (mm)	380
Exhaust length (mm)	1,310
T ^a gas emission (°C)	543
Gas flow	16.3

Alternator

Model	UCI 274 C1
Electronic Regulation	✓
AVR	SX460
Power (Kva)	110

Electric Panel

Measuring Instruments

Voltmeter	1
-----------	----------

Control Instruments

Control card	DEEP SEA
Auto start-up. Mains failure	✓

Manual start-up	✓
Remote start-up	✓
Alarms	
Start-up failure	✓
Battery charge failure	✓
Low oil pressure	✓
High engine water temperature	✓
Low fuel level	✓
Low radiator water level	✓
Emergency stop	✓
Overspeed	✓
Standby Gensets	
3-phase tracking card	✓
Battery charger maintainer	✓
Voltmeter. Switch: PHASE-MAINS-GENSET	✓
Auto/manual function	✓
LED indicators MAINS/GENSET switch	✓
Remote control software	✓
RS 485 communication port	✓
Protection Devices	
Emergency stop button	✓

Head office address:

Unit 4, Concorde Close, Sopwith Park,
Segensworth North, Fareham, Hampshire, PO15 5RT. UK
Tel: +44 (0)1489 560700 Fax: +44 (0)1489 560742
sales@powertecnicque.com www.powertecnicque.com

Power Tecnicque Ltd reserves the right to modify any characteristic without prior notice. Photos or drawings are based on standard product, being possible to add optional elements