

powertechnique

PT(S)15

Voltage (V): **400/230**

Frequency (Hz): **50**

STATIONARY WITH CANOPY


AUTOMATIC WITH ATS

Technical Information

PRP Power (kVA)	12
Standby Power	13.4
PRP Power (kW)	9.6
Standby Power (kW)	10.72
Model	STATIONARY WITH CANOPY

Weight and Dimensions (mm)	
Length (L)	1860
Width (W)	840
Height (H)	1230
Weight (kg)	610
Fuel tank capacity (l)	50.5

Noise Level	
Acoustic pressure [LpA] (dBA)	70
Acoustic power [LwA] (dBA)	90

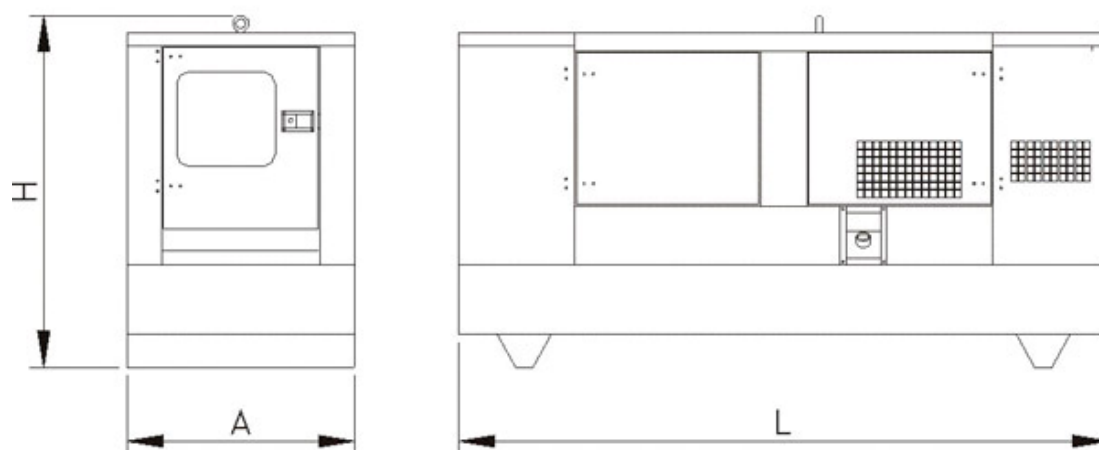

Consumption

	PRP Power		Standby Power	
	L/h	Range (hours)	L/h	Range (hours)
25%	0	0	0	0
50%	2.1	24	0	0
75%	2.8	18	0	0
100%	3.7	13.6	4.1	12.3

Engine

Brand	PERKINS
Model	403C 15 G
No. of Cylinders	3
Engine Capacity	1496
Bore (mm)	84
Stroke (mm)	90
Compression ratio	22.5:1
Water cooled	✓
Speed (r.p.m.)	1500
Preheating system	✓
Fuel tank capacity (l)	50.5

Cooling System

Flow of air from fan (m3/min)	36.6
-------------------------------	-------------

Lubrication System

Oil sump capacity (l)	6
Maximum oil consumption (%fuel consumption)	0.78

Air Intake System

Aspirated air flow (M3/min)	1.08
-----------------------------	-------------

Electrical System

Batteries	12V 60 Ah
-----------	------------------

Exhaust System

Input diameter (")	2.36
Output diameter (")	2.36
Exhaust diameter (mm)	199
Exhaust length (mm)	450
T ^a gas emission (°C)	490
Gas flow (m3/min)	2.88

Alternator

Model	FT4MDS
Power (kVA)	13.4

Electric Panel

Measuring Instruments

Voltmeter	1
Frequency meter	1
Hour meter	✓
Fuel gauge	✓
Engine water temperature gauge	✓
Battery voltage gauge	✓

Control Instruments	
Control card	DEEP SEA
Auto start-up. Mains failure	✓
Manual start-up	✓
Remote start-up	✓
Alarms	
Start-up failure	✓
Battery charge failure	✓
Low oil pressure	✓
High engine water temperature	✓
Low fuel level	✓
Low radiator water level	✓
Emergency stop	✓
Standby Gensets	
3-phase tracking card	✓
Battery charger maintainer	✓
Voltmeter. Switch: PHASE-MAINS-GENSET	✓
Auto/manual function	✓
LED indicators MAINS/GENSET switch	✓
Protection Devices	
Emergency stop button	✓
Circuit breaker	4P 20A 4P 10A
ATS	4P 25A

Head office address:
Unit 4, Concorde Close, Sopwith Park,
Segensworth North, Fareham, Hampshire, PO15 5RT. UK
Tel: +44 (0)1489 560700 Fax: +44 (0)1489 560742
sales@powertecnicque.com www.powertecnicque.com

Power Tecnicque Ltd reserves the right to modify any characteristic without prior notice. Photos or drawings are based on standard product, being possible to add optional elements