

powertechnique

PT(S)275

Voltage (V): **400/230**

Frequency (Hz): **50**

STATIONARY WITH CANOPY


AUTOMATIC WITH ATS

Technical Information

PRP Power (Kva)	250
Standby Power	275
PRP Power (Kw)	200
Standby Power (Kw)	220
Model	STATIONARY WITH CANOPY

Weight and Dimensions (mm)	
Length (L)	3675
Width (W)	1400
Height (H)	2100
Weight (kg)	3545
Fuel tank capacity (l)	405

Noise Level	
Acoustic pressure [LpA] (Dba)	69
Acoustic power [LwA] (Dba)	97

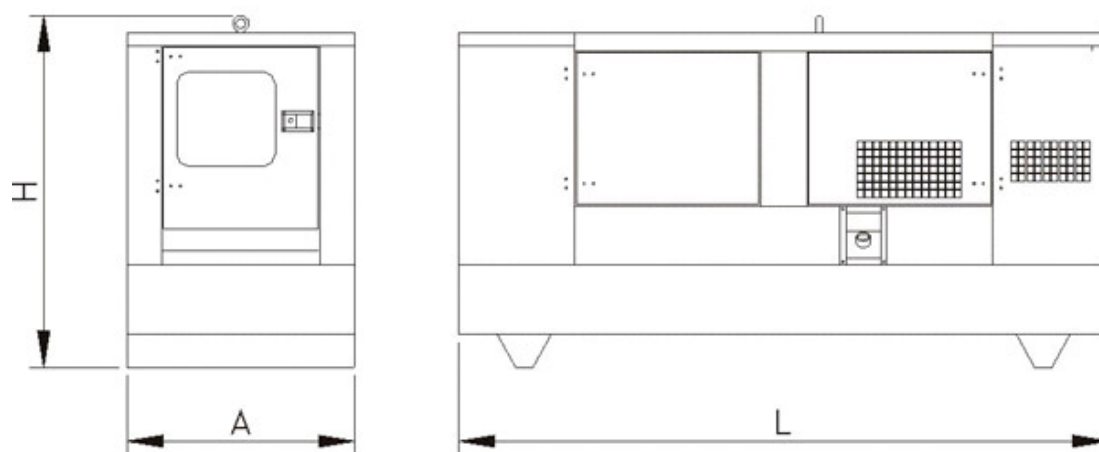

Consumption

	PRP Power		Standby Power	
	L/h	Range (hours)	L/h	Range (hours)
25%	14.5	27.9	16.3	24.8
50%	27.7	14.6	31.1	13
75%	38.8	10.4	43.1	9.4
100%	48.6	8.3	54.3	7.5

Engine

Brand	VOLVO
Model	TAD 734 GE
No. of Cylinders	6
Electronic management	✓
Engine Capacity	7150
Bore (mm)	108
Stroke (mm)	130
Compression ratio	17:1
Water cooled	✓
Speed (r.p.m.)	1500
Preheating system	✓
Fuel tank capacity (l)	405

Cooling System

Flow of air from fan (m3/min)	220
-------------------------------	------------

Lubrication System

Oil sump capacity (l)	29
Maximum oil consumption (%fuel consumption)	0.1

Air Intake System

Aspirated air flow (m3/min)	16.3
-----------------------------	-------------

Electrical System

Batteries	12V 120 Ah
-----------	-------------------

Exhaust System

Input diameter (")	4
Output diameter (")	5.5
T ^a gas emission (°C)	550
Gas flow	33.4

Alternator

Model	UCDI 274 K1
Electronic Regulation	✓
AVR	SX460
Power (Kva)	275

Electric Panel

Measuring Instruments

Voltmeter	1
Battery current gauge	✓

Control Instruments

Control card	DEEP SEA
Auto start-up. Mains failure	✓
Manual start-up	✓

Remote start-up	✓
Alarms	
Start-up failure	✓
Battery charge failure	✓
Low oil pressure	✓
High engine water temperature	✓
Low fuel level	✓
Low radiator water level	✓
Emergency stop	✓
Overspeed	✓
Standby Gensets	
3-phase tracking card	✓
Battery charger maintainer	✓
Voltmeter. Switch: PHASE-MAINS-GENSET	✓
Auto/manual function	✓
LED indicators MAINS/GENSET switch	✓
Remote control software	✓
RS 485 communication port	✓
Protection Devices	
Emergency stop button	✓
ATS	4P 400A 400/230V

Head office address:

Unit 4, Concorde Close, Sopwith Park,
Segensworth North, Fareham, Hampshire, PO15 5RT. UK
Tel: +44 (0)1489 560700 Fax: +44 (0)1489 560742
sales@powertecnicque.com www.powertecnicque.com

Power Tecnicque Ltd reserves the right to modify any characteristic without prior notice. Photos or drawings are based on standard product, being possible to add optional elements